




# Klemm 708

# Klemm 708

## Technical Data

Crawler Base		Drill Masts	
Spec ground pressure	4.8 N/cm <sup>2</sup>	Total mast length without winch	5200mm
Total width	2000mm	Feed length	3100mm
Length, axle to axle	2060mm	Max casing length	2500mm
Length of tracks	2660mm	Feed and retraction	40 kN/4 tons
		Fast feed	46.6 m/min
		Fast retraction	46.6 m/min

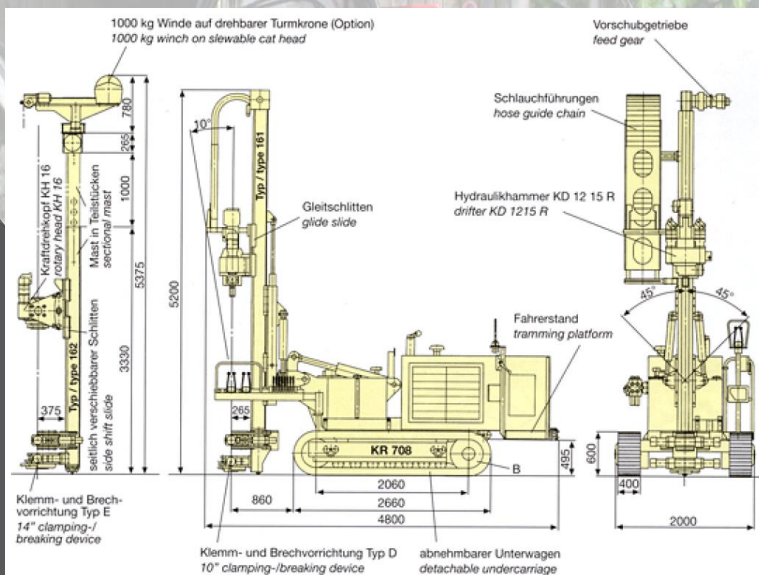

Tel: 01252 550 222

The Klemm 708 is a multi-purpose drill rig for all drilling systems. A series of options is available to provide the optimum rig configuration for a particular drilling process:

- Rotary heads up to 27 kNm torque
- Hydraulic clamping and breaking device for casings up to Ø 508mm
- Cable winch up to 20 kN (4,400 lbs) pull-force
- Slewable cat-head for winches up to 10 kN (2,200 lbs) pull-force
- 2-speed motors for rotary heads and hydraulic drifters
- Slide with lateral displacement
- Section mast, for different head rooms adaptable

The rig conception allows an easy dismantling of the complete basic unit from the crawler base.